

ITEM	DESCRIPTION	QTTY	UNIT	RATE
	<b>PROPOSED IMPROVEMENT AND RENOVATION WORKS TO 2 NO CLASSROOM BLOCK AT GENGE PRIMARY SCHOOL IN SUBA NORTH SUB COUNTY</b>			
	<b>SECTION 1:</b>			
	<b>REMOVALS, HACKINGS, TAKE OUTS AND CLEANING EXISTING SURFACE</b>			
	<b>Carefully remove, takeout and set aside and arrange to handover to the client any reusable materials and cart way surplus debris arising there from:</b>			
A	Existing GCI roof covering and Rotten trusses timber	156	Sm	
	<b>Carefully hack out the following finishes and cart away debris arising there from:</b>			
B	Existing cement /sand screed to floor	86	Sm	
C	Existing sand cement render to plinth area <b>the following painted sufaces in readiness for new finish</b>	32	Sm	
D	Vertical sides of internal walls	148	Sm	
E	Ditto external walls	138	Sm	
	<b>Carried to Collection</b>			<b>Kshs</b>

GPS/REN/PAGE1

ITEM	DESCRIPTION	UNIT	QTTY	RATE
	<b>SECTION 2</b>			
	<b>Roof work</b>			
A	Allow for a sum of Kenya shillings fifteen thousand for replacing rotten timber members	Sum		
	<b>Roof Covering</b>			
B	28 G pre-painted GCI sheets blue box profile(MRM) fixed with rubber washers to match on the existing timber susrface	Sm	168	
C	Ditto 450mm wide ridge cap	Lm	16	

C	75mm diameter x 2400 x 3mm thick RHS black pipe including welding 100 x 5 mm thick U-shaped plate on top to receive timber beam(m.s) and bolted in column concrete based	No	6	
D	Prepare and apply three coats of first quality gloss oil paint to surface of metal 0-100mm girth <b>Fascia and Verge Board</b>	Lm	16	
E	Prepare and apply two coats of first quality gloss oil paint to Timber surface	72	Sm	
<b>Carried to Colletion</b>				<b>Ksh</b>

GPS/REN/Page - 2

ITEM	DESCRIPTION	UNIT	QTTY	RATE
<b>SECTION 2</b>				
<b>DOORS</b>				
<i>Supply and fixed purpose made Steel casement doors to Architectural details</i>				
A	1200 x 2400mm high double leaf door including 300mm high fanlight above	2	No	
<b>Glazing</b>				
B	5mm thick clear sheet glasses pane 0.1 but not exceeding 0.5mm <sup>2</sup>	2	Sm	
<b>Painting and Decoration</b>				
<b>Prepare and apply one coat primer one undercoat and two coats gloss oil to crow solo or other equal and approved to:</b>				
C	General surface of casement metal doors over 300mm girth generally internally and externally	12	Sm	
<b>Carried to Colletion</b>				<b>Ksh</b>

GPS/REN/Page - 3

ITEM	DESCRIPTION	QTTY	UNIT	RATE
<b>Section 2</b>				
<b>WINDOWS</b>				
<i>Supply and fix the following standard Alluminium casement purpose made windows including all necessary cuttings lugs, stays and bedding into walls in cement sand mortar 1:4 complete with all necessary accessories and priming once in red-oxide with and</i>				

	<i>including nominal burglar proofing in 25 x 10mm R.H.S bars at approved pattern including fanlight above</i>			
A	Window size 1500 x 1200mm high	6	No	
	<b><u>Glazing</u></b>			
B	4mm thick clear sheet glass in panes 0.1 -0.5m2 fixed to steel window panes with putty	16	Sm	
	<b><u>Painting and Decoration</u></b>			
	<b>Prepare and apply one coat primer one undercoat and two coats gloss oil to crow solo or other equal and approved to:</b>			
C	General surface of casement metal doors over 300mm girth generally internally and externally	32	Sm	
	<b>Carried to Collection</b>			<b>Ksh</b>

ITEM	DESCRIPTION	QTTY	UNIT	RATE
	<b><u>SECTION 5</u></b>			
	<b><u>FINISHES</u></b>			
	<b><u>Walls</u></b>			
	<b><u>Lime gauged (1:1:6) plaster as described on masonry</u></b>			
A	12mm thick plaster in two coats to brick wall internally cement sand lime 1:1:6 with a smooth float to wall internally	78	SM	
B	Ditto reveals and jambs	8	SM	
	<b><u>12mm thick (1:4) render as described on masonry externally</u></b>			
C	12mm thick gauge cement sand rendered 1:4 to wall finished smooth with wood float externally	114	SM	
D	Ditto reveals and jambs	2	SM	
	<b><u>Plinth</u></b>			
E	15mm thick cement sand (1:3) render to plinth area	18	SM	
	<b><u>Floor</u></b>			
F	38mm thick cement and sand (1:3) screed to receive floor tiles	128	Sm	
	<b><u>300x300x6mm coloured ceramic floor tiles as manufactured by</u></b>			

	<b><u>SAJ' or other equal and approved on cement backing and pointing and joining in matching cement grout to :</u></b>			
G	Floor	128	SM	
H	100mm high Ditto skirting	56	Lm	
	<b><u>Plinth</u></b>			
I	15mm thick cement sand (1:3) render to plinth area	18	Sm	
	<b><u>Painting and Decoration</u></b>			
J	Apply three coats of vinyl paint to wall surface internally	162	Sm	
K	Apply two coats of first grade plastic emulsion paint to wall externally	116	Sm	
L	Apply two coats of bituminous black paint to plinth area	18	Lm	
	<b><u>Black Wall</u></b>			
M	Prepare and apply two coats of black board paints to plastered surface	12	SM	
	<b>Carried to collection</b>			<b>Ksh</b>

GPS/REN/Page -5

ITEM	DESCRIPTION	
	<b><u>SUMMARY OF COLLECTION</u></b>	
A	TOTAL FOR COLLECTIONS FROM <i>GPS/REN/ Page 1</i>	
B	TOTAL FOR COLLECTIONS FROM <i>GPS/REN/ Page 2</i>	
C	TOTAL FOR COLLECTIONS FROM <i>GPS/REN/ Page 3</i>	
D	TOTAL FOR COLLECTIONS FROM <i>GPS/REN/ Page 4</i>	
E	TOTAL FOR COLLECTIONS FROM <i>GPS/REN/ Page 5</i>	

	<b>TOTAL FOR COLLECTIONS (BUILDER'S WORK)</b>
	<b>CARRIED TO COLLECTIO SUMMARY</b>

GPS/REN/Page -6

ITEM	DECSRIPTION	AMOUNT ( KSHS)
	<b><u>PROVISIONAL SUMS</u></b>	
A	Allow for a provisional sum of kenya shillings Ten thousand for contingencies	
B	Allow for a provisional sum of kenya shillings thirty five thousand for Electricla works	
	<b>TOTAL FOR PROVISIONAL SUMS</b>	
	<b>CARRIED TO SUMMARY</b>	

GPS/REN/Page -7

ITEM	DESCRIPTION	FOR OFFICIAL USE (KSHS.)
	<b><u>GRAND SUMMARY</u></b>	
A	Builder's work from GPS/REN/ Page 6	
B	Provisional sums from GPS/ REN/ Page 7	45,000.00
	<b>Sub - Total</b>	
	Add 16% V A T	

C	Project Management By PMC	30,000.00
D	Project Supervision	20,000.00
E	Project Documentation	1,000.00
F	Project brandering & erection of sign post	20,000.00
<b>GRAND TOTAL</b>		
<b>CARRIED TO FORM OF TENDER</b>		

**Amount in words Kenya Shillings:**.....

**Tender's Name:**.....

**Address:**.....

**Signature & Stamp:**.....

**Date:**.....

**Witness Name:**.....


**Address:**.....

**Signature:**.....

**Date:**.....





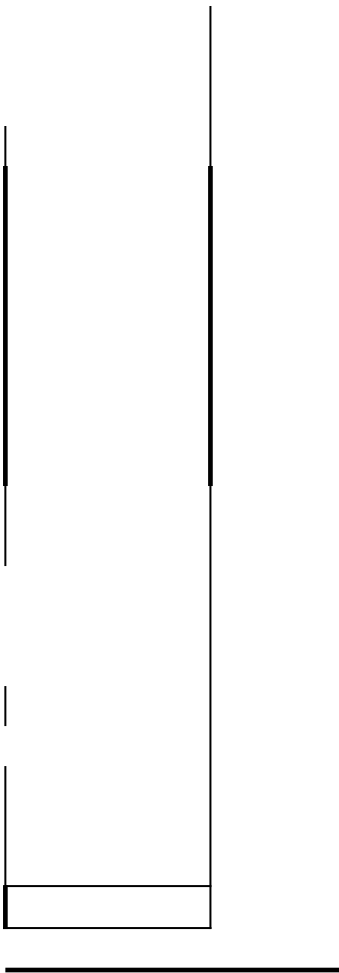


AMOUNT




10,000.00
35,000.00
45,000.00

FOR CONTRACTOR'S USE (KSHS.)



.....

.