

ITEM	DESCRIPTION	QTTY
<b><u>PROPOSED FENCING AT KAMSAMA PRIMARY SCHOOL IN SUBA NORTH SUB COUNTY</u></b>		
<b><u>FENCING WITH CONCRETE POST</u></b>		
<b><u>Site clearance</u></b>		
A	Clear the site along the fence line approximately 1200mm wide off all shrubs and grass then burn on site.	648
B	Cut down trees with average girth of 800mm, grab out roots, stumps and burn on site.	8
C	Provide material and erect chain link fence 2400mm high consisting of 100 by 100x3000mm high and cranked at top reinforced concrete 1;2;4 (20mm) Post at 3.0M centres and reinforced with and including no. 6mm MS steel rod and 6mm MS strrrups @ 300mm centre to centre with bottom end of post motticed in and including plain concrete 1;3;6 (40mm) surrounding size 300 by 300 by 300mm including excavation 600mm deep. <i>Include 6 no. strands of 12 1/2 gauge galvanised barbed wire and 2.4M BY 14 gauge chain link wire and the whole stretched tight and even including levelling the ground as necessary all to approve</i>	540
D	Extra over ditto for double corner posts each with raking strats 3 no. 160 by 8mm galvanised hooks bolt straining wire	28
E	Ditto to strainers post with two supports on sides precast RC 1;2;4 (20mm) raking strat size 100 by 100 by 800mm with top and bolt to fence with and including 12mm dia galvanised steel bolt and bottom end of post motticed in and including plain concrete 1;3;6 (40mm) surround size 300 by 300mm including excavation 600mm deep and post fitted with 3 no. 160 by by 8mm galvanised hooks bolt straining wire	38
F	100mm by 100mm thick concrete 1;3;6 including all necessary preparation to receive freshly prepared concrete to hold the chain link at the bottom edge	540

	<b>Total for fencing Carried to Summary</b>	
--	---	--

KPS/FEN/Page-1

ITEM	DESCRIPTION	QTTY
	<b><u>GATE</u></b>	
A	Excavate column pit size 1100x1100x1200mm deep	4
B	vibrated reinforced concete 1.2.4 20c class in pillars size 300x300x2200mm high and columnb base 300mm thick	1.5
	<b><u>Reinforcement</u></b>	
C	12 mm diameter bars reinforcements on columns	65
D	8mm diameter bars reinforcements on columns rings	12
E	Supply and fixe Timber formwork to sides of the columns to hold the reinforced concrete	7
F	12mm thick render to sides of columns	7
G	Prepare and apply three coats of first quality of plastic emulsion paint to the columns	7
H	Supply and fixe 400x400mm precast concrete copping to top of column	3
J	Provide and install prefabricated double leave steel gate size 4000 x 2000m high in two equal leaves aech size 2000x2000mm all done pattern framing 50x32x3 intermeate bars at 100mm interval and spiked studs with hugs ,hook and lockable bolts 300mm long including casting leaf into column in cement sand mortar 1;3 mix mix 50 x 50 x 3mm RHS tube framework complete with bushes and pinning logs in VRC column size 300 x 300 x 2200mm	1
K	Ditto pedestria gate but single leaf overall size 1500x2000mm high complete with bushes and pinning logs in VRC column size 300 x 300 x 2200mm	1
L	Prepare and apply three coats of first quality of gloss oil paint to metal surface of gate	22
	<b>Total for Gate Carriad summary</b>	

KPS/FEN/Page-2

ITEM	DECSRIPTION
	<b><u>SUMMARY OF ELEMENTS</u></b>
A	TOTAL FROM KPS/FEN/Page-1
B	TOTAL FROM KPS/FEN/Page-2

**TOTAL FOR BUILDER'S WORK  
CARRIED TO GRAND SUMMARY**

**KPS/FEN/Page-3**

ITEM	DESCRIPTION
A	<p><b><u>PROVISIONAL AND PRIME COST</u></b></p> <p>Allow for provisional sum of Kenya Shilling five thousand for contingencies</p>
	<p><b>TOTAL FOR PROVISIONAL SUMS CARRIED TO SUMMARY</b></p>
	<p><b>CARRIED TO SUMMARY</b></p>

**KPS/FEN/Page-4**

ITEM	DESCRIPTION	FO OFFI US
	<p><b><u>GRAND SUMMARY</u></b></p>	
A	<p><b>Builder work from KPS/FEN/Page-3</b></p>	
B	<p><b>Provisinal sum from KPS/FEN/Page-4</b></p>	
	<p><b>Sub Total</b></p>	
C	<p><b>ADD V.A.T 16%</b></p>	
D	<p><b>Project Management By PMC</b></p>	

E	Project Supervision	
F	Project Documentation	
G	Project Branding and Erection of Sign Post	
<b>GRAND TOTAL</b>		
<b>CARRIED TO FORM OF TENDER</b>		

*Amount in Words Kenya Shillings:.....*

**Tenderer's Name:** \_\_\_\_\_

**Address:** \_\_\_\_\_

**Signature & Stamp:** \_\_\_\_\_

**Date:** \_\_\_\_\_

**Witness Name:** \_\_\_\_\_

**Address:** \_\_\_\_\_

**Signature:** \_\_\_\_\_

**Date:** \_\_\_\_\_

UNIT	RATE	AMOUNT
Sm		
Item		
Lm		
No		
No.		
Lm		
		-

	Kshs	-


UNIT	RATE	AMOUNT
Cm		
Cm		
KG		
KG		
Sm		
Sm		
Sm		
No		
NO		
No		
Sm		
	Kshs	

	AMOUNT (KSHS.)
	-
	-

	-

	AMOUNT (KSHS)
	5,000.00
<b>Kshs</b>	<b>5,000.00</b>

FOR CONTRACTOR'S USE	FOR CONTRACTOR'S USE
5,000.00	
40,000.00	

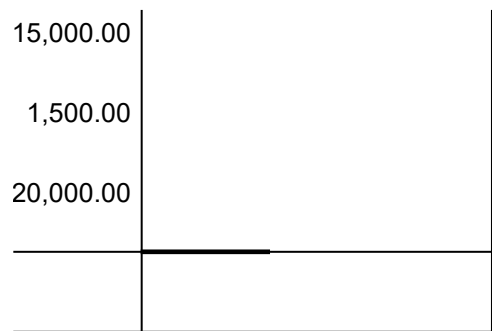

.....